

D2FE

Full HD 2MP Fisheye Network Dome Camera



D2FE is a full HD 2.0 MegaPixel fisheye network Dome camera with 180° viewing angle. This camera can significantly reduce the number of cameras, infrastructure and security personnel needed to monitor a large area in applications such as retail surveillance, airport security, manufacturing, schools or public spaces.

roboza
PREMIUM CCTV



2.0MP



PoE



180° Fish Eye



1.25mm Lens



Day / Night



2D-DNR



Micro-SD


FEATURES

- Full HD 2.0 megapixel resolution (1920 x 1080) @ 25/30fps
- H.264/MPEG video compression with dual stream
- Day/Night Vision
- AWB, AGC, BLC
- 2D Digital Noise Reduction
- 180° Panoramic view
- 1.25mm Fisheye lens
- Built-in Microphone
- Micro SD-card slot (up to 64GB)
- 12V DC, PoE
- Built-in web server, CMS, smartphone/tablet support

Fish Eye Coverage - 180° viewing angle



Best used in





D2FE

Full HD 2.0MP Fisheye Dome Camera

SPECIFICATIONS

	Model	D2FE	
CAMERA	Imaging Device	1/2.8" 2Megapixel Exmor CMOS progressive scan	
	Effective Pixels	1920(H)x1080(V)	
	Electronic Shutter Speed	Auto/Manual 1/3~1/10000	
	Min. Illumination	Color: 0. 1LUX/F1.4	
	S/N Ratio	>50dB	
CAMERA FEATURES	Day/Night	Auto(Electronic) / Color / B/W	
	Backlight Compensation	BLC	
	White Balance	Auto	
	Gain Control	Auto/Manual	
	Noise Reduction	2D	
	Privacy Masking	Up to 4 areas	
LENS	Focal Length	1.25mm	
	Max Aperture	F1.8	
	Angle of View	H: 180°±5°	
	Mount Type	Board-in Type	
VIDEO	Compression	H.264 / MJPEG	
	Resolution	1080P(1920× 1080)/SXGA(1280× 1024)720P(1280×720)/ D1(704× 576) /CIF(352× 288)/	
	Frame Rate	Main Stream	1080P(1~30fps)/SXGA(1~30fps)/720P(1 ~ 25/30fps)
		Sub Stream	D1/CIF(1 ~ 25/30fps)
Bit Rate	H.264: 32K ~ 8192Kbps, MJPEG: 32K ~ 12288Kbps		
NETWORK	Ethernet	RJ-45 (10/100Base-T)	
	Protocol	IPv4/IPv6, HTTP, HTTPS, SSL, TCP/IP, UDP, UPnP, ICMP, IGMP, SNMP, RTSP, RTP, SMTP, NTP, DHCP, DNS, PPPOE, DDNS, FTP, IP Filter, QoS, Bonjour	
	ONVIF	ONVIF Profile S	
	Max. User Access	10 users	
	Mobile Viewing	iPhone, iPad, Android, Windows Phone	
GENERAL	Input Voltage / Current	12V DC, PoE(802.3af)	
	Memory Slot	Micro SD (max. 64GB)	
	Power Consumption	<2.5W	
	Operating Temperature / Humidity	-10°C ~ +50°C (14°F ~ +140°F) / 10% - 90% RH	
	Dimensions	110 x 54mm (4.3 x 2.1")	
	Weight	0.25kg (1lb)	

DIMENSIONS

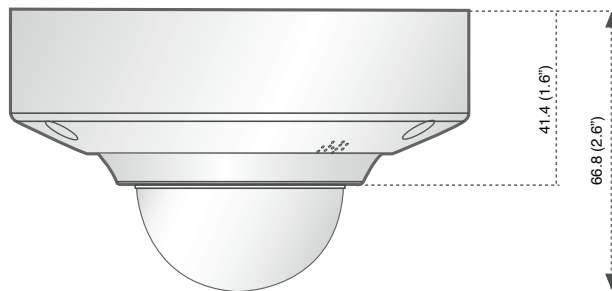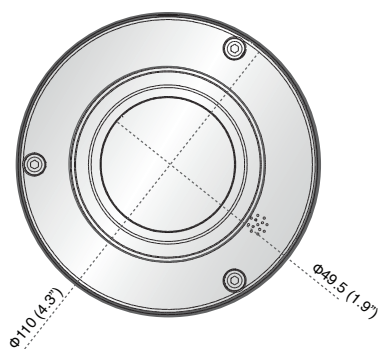

Unit: mm (inch)